




GPS Covert/window mount Antenna

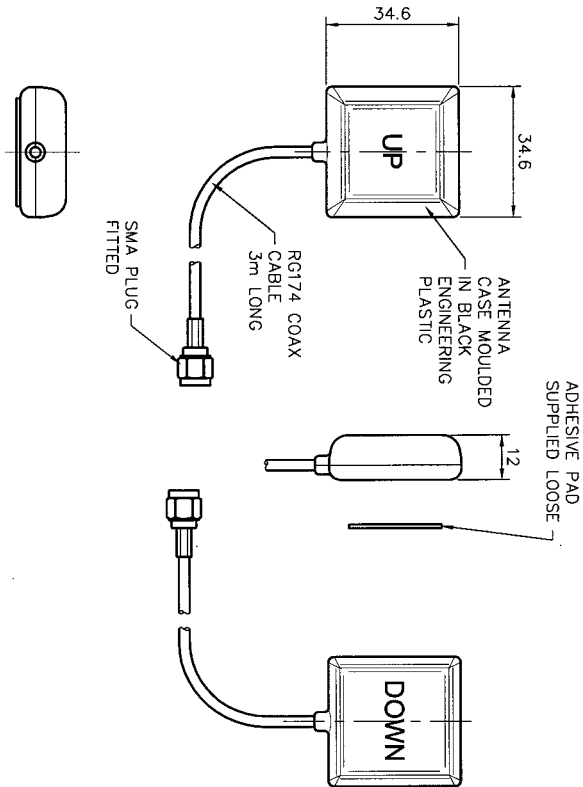

Electrical Data

Frequency Range (MHz)	1575
VSWR	<2.0:1 ± 4MHz
Gain: LNA	26dB
Polarisation	Right Hand Circular
Operating Voltage	3 - 7V DC (fed via coax)
Impedance	50 Ohms
Current	Typical 14mA

Mechanical Data

Weight (g)		
Operating Temp (°C)	-40° / +80°C	
Dimensions (mm)	Length	34.6
	Width	34.6
	Height	12
Material	Engineering Plastic	
Colour	Black	

Mounting Data

Fixing	Adhesive Pad
--------	--------------

Cable Data

Type	RG174
Length (m)	3
Thickness (mm)	3
Termination	SMA Plug

